



PVCTUB

CLEAR PVC TUBING - FOOD GRADE

Application:

For handling beverages, food stuffs and liquids where clarity, flexibility and a food grade compound are required. This product complies with all applicable FDA, 3A, NSF-51 and NSF-61 requirements.

Construction:

Tube - Crystal clear non-toxic, odourless and taste free PVC compound manufactured in compliance with applicable FDA, 3A, NSF-51 and NSF-61 requirements

Cover - Food grade crystal clear PVC

Temperature Range:

-4°C to +65°C (+25°F to +150°F)

Standard Lengths:

1/8" to 1" 100ft
1-1/4" to 2" 50ft

Parts No.	I.D. Inches	O.D. Inches	Wall Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
PVCTUB-.125	1/8	1/4	1/16	65	.020
PVCTUB-.188-.25	3/16	1/4	1/32	50	.012
PVCTUB-.188	3/16	5/16	1/16	55	.027
PVCTUB-.25-.375	1/4	3/8	1/16	55	.034
PVCTUB-.25-5	1/4	1/2	1/8	60	.080
PVCTUB-.313	5/16	7/16	1/16	50	.040
PVCTUB-.375-.5	3/8	1/2	1/16	45	.047
PVCTUB-.375-.625	3/8	5/8	1/8	55	.107
PVCTUB-.5-.625	1/2	5/8	1/8	30	.060
PVCTUB-.5-.75	1/2	3/4	1/8	45	.134
PVCTUB-.625-.75	5/8	3/4	1/16	30	.082
PVCTUB-.625	5/8	7/8	1/8	40	.161
PVCTUB-.75	3/4	1	1/8	35	.188
PVCTUB-.875	7/8	1-1/8	1/8	30	.214
PVCTUB-1	1	1-1/4	1/8	25	.241
PVCTUB-1-1.5	1	1-1/2	1/4	35	.536
PVCTUB-1.25	1-1/4	1-1/2	1/8	20	.296
PVCTUB-1.5	1-1/2	1-7/8	3/16	30	.542
PVCTUB-1.5-2	1-1/2	2	1/4	35	.750
PVCTUB-2	2	2-1/2	1/4	35	.964



POLY

POLYETHYLENE TUBING - FOOD GRADE

Application:

Used as instrumentation tubing and as transmission lines for air, liquids and gases. Non corrosive, odourless and tasteless. Milky white colour. Food grade.


Construction:

Low density extruded polyethylene tubing is manufactured from top quality virgin resins, is free from impurities and offers excellent resistance to stress cracking. Food grade.

Temperature Range:

-45°C to +60°C (-50°F to +140°F)

Parts No.	I.D. Inches	O.D. Inches	Wall Inches	STD Lengths FT.	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
POLY-.125	1/8	1/4	0.062	2000	150	0.015
POLY-.170	.170	1/4	0.040	2000	140	0.011
POLY-.188	3/16	5/16	0.062	1500	150	0.020
POLY-.25	1/4	3/8	0.062	1000	125	0.025
POLY-.375	3/8	1/2	0.062	500	100	0.035
POLY-.5	1/2	5/8	0.062	500	75	0.045

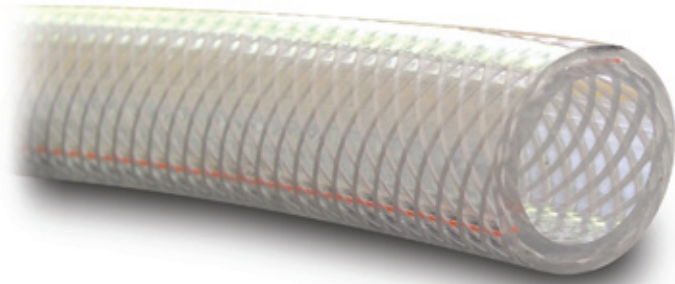

CRF

CLEAR REINFORCED PVC FOOD GRADE

Application:

Air, drinking water, mild chemicals and alkalis. This product complies with all applicable FDA, 3A, NSF-51 and NSF-61 requirements.

Construction:

Tube - Clear smooth PVC. NSF-51 & NSF-61 certified material
 Reinforcement - High tensile synthetic braid
 Cover - Clear smooth PVC. NSF-51 & NSF-61 certified material


Temperature Range:

-4°C to +65°C (+25°F to +150°F)

Standard Lengths:

3/16", 5/16"	100ft / 300ft Coils
1/4", 3/8", 1/2"	50ft / 100ft / 300ft Coils & 500ft Reels
5/8"	100ft / 200ft / 300ft Coils
3/4"	50ft / 100ft / 200ft Coils & 500ft Reels
1"	50ft / 100ft / 200ft Coils & 300ft Reels
1-1/4", 1-1/2", 2"	50ft / 100ft Coils

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
CRF-.188	3/16	.375	250	0.04
CRF-.25	1/4	.438	250	0.06
CRF-.313	5/16	.531	250	0.08
CRF-.375	3/8	.594	225	0.09
CRF-.5	1/2	.750	200	0.13
CRF-.625	5/8	.891	200	0.18
CRF-.75	3/4	1.031	150	0.22
CRF-1	1	1.300	125	0.30
CRF-1.25	1-1/4	1.620	100	0.45
CRF-1.5	1-1/2	1.938	100	0.64
CRF-2	2	2.490	75	0.94

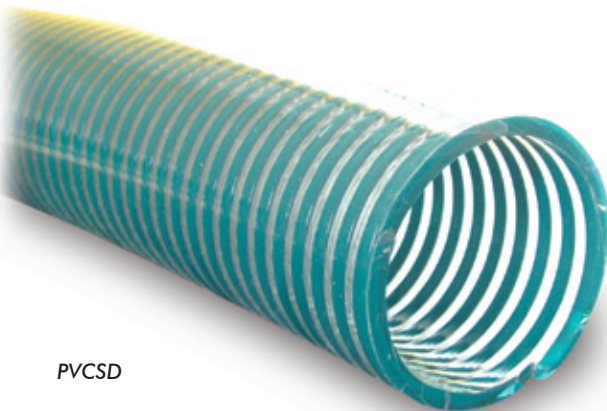

PVCSD

PVC WATER SUCTION & DISCHARGE GENERAL PURPOSE HEAVY DUTY

Application:

For construction pumps, septic tank and marine pump out service, mining and quarry use. PVC is resistant to some chemicals, acids and alkalis. Suitable for full vacuum.

Construction:

Tube - Smooth clear PVC
 Reinforcement - Green PVC Helix
 Cover - Clear PVC with excellent weather and abrasion resistance

Temperature Range:

-20°C to +70°C (-4°F to +158°F)

Standard Lengths:

1" - 6"	100ft cut to multiples of 5ft at no charge
8"	20ft, no cutting

Parts No.	I.D. Inches	O.D. Inches	Vacuum Rating	Bend Radius Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
PVCSD-.75	3/4	1.01	28	3	110	0.19
PVCSD-1	1	1.26	28	3	85	0.26
PVCSD-1.25	1-1/4	1.56	28	4	85	0.35
PVCSD-1.5	1-1/2	1.83	28	5	70	0.48
PVCSD-2	2	2.32	28	7	65	0.66
PVCSD-2.5	2-1/2	2.87	28	8	65	0.87
PVCSD-3	3	3.43	28	10	65	1.24
PVCSD-4	4	4.50	28	15	55	1.85
PVCSD-6	6	6.75	28	30	40	3.39
PVCSD-8	8	8.86	26	35	30	5.63

* 6 and 8 inch come with a convoluted cover for greater flexibility.