

INDUSTRIAL TANKS

The Engineered Difference in Tanks



F
LASCO



**Welding &
Fabrication Inc.**

VERTICAL TANKS

Part No.	Gallons	Brimful	Diameter	Height	Manway
1530000N--	22	22	18"	23"	2"
1541000N--	30	30	23"	23"	10"
1000101N--	35	35	22"	36"	6"
1540700N--	50	56	23"	38"	10"
5680000N--	60	60	26"	40"	14"
1550000N--	65	70	23"	46"	6"
1007200N--	70	70	23"	42"	8"
1009000N--	70	70	23"	41"	8"
5690000N--	90	94	34"	36"	14"
1011000N--	100	100	35"	30"	8"
1012700N--	100	100	30"	41"	8"
8010000N--	110	115	33"	41"	10"
5700000N--	120	125	34"	50"	14"
1540200N--	120	120	32"	39"	10"
1007300N--	130	130	29"	51"	8"
1009500N--	130	130	29"	49"	8"
1012800N--	150	150	30"	59"	18"
5710000N--	150	155	34"	60"	14"
1008400N--	175	175	29"	66"	8"
1540400N--	190	205	42"	47"	10"
1012900N--	210	210	36"	55"	18"
1011100N--	200	200	35"	56"	8"
1008000N--	200	200	36"	53"	18"
5720000N--	200	213	40"	56"	14"
1540000N--	200	235	40"	48"	6"
1540300N--	200	200	36"	59"	10"
8020000N--	200	215	33"	69"	10"
1008100N--	250	250	36"	64"	18"
5730000N--	250	260	40"	67"	14"
5740000N--	275	285	47"	56"	14"
1013000N--	290	290	36"	72"	18"
1630000N--	300	300	35"	80"	18"
1630200N--	290	310	42"	59"	10"
1630100N--	300	300	36"	82"	10"
8030000N--	300	315	33"	94"	10"
1011200N--	300	300	35"	85"	8"
8040000N--	300	318	46"	51"	10"



- **Industrial (ASTM D-1998-06) and Commercial design standards available.**
- **Material options for a diverse range of application requirements:**
 - High-density linear polyethylene (HDLPE) - black and natural white color - Complies with FDA Regulation 177.1520 and NSF standard 61.
 - Cross-linked, high-density polyethylene (XLPE) - black and natural white color.
 - Opaque white sodium hypochlorite resin #880059 up to 12,500 gallons for outdoor application.
 - Sulfuric acid HDLPE resin #880046 up to 15,000 gallons.
- **Available with cable restraint systems that meet 150 mph wind load and IBC seismic requirements.**
- **Specific gravity ratings are based on the industry's most severe calculation.**
- **Standard specific gravity choices are 1.5 and 1.9, other ratings are available upon request.**
- **All materials are UV stabilized for long-term outdoor service.**

VERTICAL TANKS

Part No.	Gallons	Brimful	Diameter	Height	Manway
5750000N--	330	342	47"	66"	14"
1630300N--	330	360	48"	55"	10"
1008200N--	330	330	47"	50"	18"
1011600N--	330	330	44"	58"	18"
5760000N--	360	373	53"	56"	14"
5760000N--	360	373	53"	56"	14"
1740000N--	400	400	45"	62"	18"
5770000N--	440	456	53"	67"	14"
5780000N--	500	518	53"	74"	14"
1800000N--	550	550	48"	75"	18"
1820000N--	550	580	64"	47"	18"
8060000N--	550	580	64"	46"	18"
1700100N--	700	720	48"	99"	18"
1700200N--	710	710	60"	68"	18"
1810000N--	850	850	48"	117"	18"
1831000N--	1000	1100	60"	89"	18"
1830000N--	1100	1140	64"	90"	18"
1710000N--	1100	1150	86"	55"	18"
8120000N--	1100	1150	86"	55"	18"
1830200N--	1200	1240	60"	109"	18"
1830400N--	1300	1400	72"	87"	18"
1840300N--	1400	1500	60"	128"	18"
1770000N--	1500	1550	86"	72"	18"
8120100N--	1500	1550	86"	72"	18"
1840000N--	1550	1600	64"	124"	18"
1780200N--	1900	1930	72"	119"	18"
8300000N--	1900	1950	64"	147"	18"
5050300N--	2000	2000	96"	84"	18"
5050000N--	2000	2300	90"	88"	18"
8130000N--	2000	2100	90"	88"	18"
5090000N--	2500	2600	90"	107"	18"
8140000N--	2500	2600	90"	107"	18"
5090300N--	2500	2600	96"	98"	18"
8390000N--	2650	3000	102"	97"	18"



- **Industrial (ASTM D-1998-06) and Commercial design standards available.**
- **Material options for a diverse range of application requirements:**
 - High-density linear polyethylene (HDLPE) - black and natural white color - Complies with FDA Regulation 177.1520 and NSF standard 61.
 - Cross-linked, high-density polyethylene (XLPE) - black and natural white color.
 - Opaque white sodium hypochlorite resin #880059 up to 12,500 gallons for outdoor application.
 - Sulfuric acid HDLPE resin #880046 up to 15,000 gallons.
- **Available with cable restraint systems that meet 150 mph wind load and IBC seismic requirements.**
- **Specific gravity ratings are based on the industry's most severe calculation.**
- **Standard specific gravity choices are 1.5 and 1.9, other ratings are available upon request.**
- **All materials are UV stabilized for long- term outdoor service.**

VERTICAL TANKS

Part No.	Gallons	Brimful	Diameter	Height	Manway
5130300N--	3000	3000	96"	111"	18"
5130000N--	3000	3150	90"	127"	18"
8160000N--	3000	3150	90"	127"	18"
7410000N--	3000	3200	102"	96"	18"
8190000N--	3650	4000	102"	126"	18"
5190000N--	3900	4100	90"	163"	18"
7421100N--	4000	4300	120"	104"	18"
7360000N--	4100	4200	102"	130"	18"
8200000N--	4100	4400	120"	100"	18"
5210000N--	4400	4600	90"	182"	18"
7420000N--	4500	4700	102"	142"	18"
7000400N--	4500	5300	143"	91"	18"
7000500N--	4600	5100	120"	116"	18"
8210000N--	4650	5000	102"	154"	18"
5480000N--	4900	5100	90"	202"	18"
1002100N--	5000	5100	102"	154"	18"
7020000N--	5500	5600	90"	221"	18"
7000000N--	5500	6000	120"	132"	18"
5250000N--	5600	6350	142"	102"	18"
7430000N--	6000	6300	102"	188"	18"
7140300N--	6000	6500	120"	145"	18"
8220000N--	6200	6300	120"	140"	18"
7140000N--	6500	7000	120"	153"	18"
5300400N--	6600	7100	120"	158"	18"
5300500N--	6600	7600	143"	123"	18"
5300000N--	7000	7700	142"	122"	18"
7440000N--	7500	7800	102"	234"	18"
7370000N--	7900	8150	120"	177"	18"
5320300N--	8000	8875	143"	144"	18"
5300600N--	8000	8300	120"	186"	18"
7400000N--	8500	8950	120"	194"	18"
5360000N--	8750	9250	142"	143"	18"
7450000N--	9500	9900	120"	215"	18"
5330000N--	10,500	10,850	142"	169"	18"
5330300N--	10,500	10,850	143"	177"	18"
5350000N--	12,500	12,750	142"	198"	18"
5370000N--	15,000	15,250	142"	234"	18"
5380000N--	16,500	16,800	142"	257"	18"



USED OIL COLLECTION TANKS

Enjoy enhanced operational and environmental safety with Used Oil Collection Tanks.



- Unique tank-in-a-tank containment system provides 120% containment of tanks contents.
- Primary tank is black, Secondary containment tank is safety yellow.
- Complies with the latest EPA standards for waste oil storage containers CFR 40- 279.22.
- 2" top draw quick-connect drain coupling
- 12" hinged lockable manway for indoor or outdoor security.
- Debris strainer basket.
- Optional Tank Level Indicator.
- Maintenance free, won't rust, chip or dent.
- Vented, weather resistant design.
- Made from 100% recyclable polyethylene
- 120, 150, 275, 360 and 500 gallon sizes available.

Part No.	Gallons	Diameter	Height	Optional Level Gauges
5980000N89102	120	34"	49"	35900105
1000400N89102	150	34"	60"	35900104
1000500N89102	275	47"	60"	35900103
1000600N89102	360	53"	60"	35900103
1000800N89102	500	53"	79"	35900102



Forklift channels on 275, 360 & 500 gallon sizes.



12" hinged lockable manway for indoor or outdoor security



Debris Strainer basket



2" top draw quick connect drain coupling with internal suction pipe.



Optional tank level indicator.

DOUBLE-WALL TANKS



Smaller dual-containment tanks provide added safety and environmental protection in more confined or remote storage locations. The advanced double-wall tank design is enclosed to prohibit foreign matter from entering the secondary

containment tank, and a unique octagonal shape provides optimal spacing and sealing surface for the industry's most reliable transition fitting.

DUAL CONTAINMENTS-MINI-CAPTORS

Part No.	Style	Gallons	Diameter	Height	Manway
1010100N--	DCT-ST*	15	23"	23"	8"
1010300N--	DCT-ST*	30	23"	35"	8"
1000200N--	DCT	35	22"	36"	6"
1010500N--	DCT-ST*	55	28"	36"	8"
1000300N--	DCT	60	26"	41"	14"
1010700N--	DCT-ST*	100	33"	44"	8"
5980000N--	DCT	120	34"	49"	14"
1010900N--	DCT-ST*	140	32X32"	48"	8"
1000400N--	DCT	150	34"	60"	14"
1000500N--	DCT	275	47"	60"	14"
1000600N--	DCT	360	53"	60"	14"
1000800N--	DCT	500	53"	79"	14"

*DCT-ST Systems can only have top fittings installed.

Rib Reinforced Flat Top Design

provides ample surface space for chemical feed pump mounting.

Primary Tank is available in both closed and open-top tank designs.

Top Draw-Tube Assembly enables material contents to be safely dispensed from the top of the tank. (optional)

Two Tanks within one design provide double-wall protection.

Available in XLPE and HDLPE resin packages.

Transition Fitting allows side safe installation and long-term sealing power through both walls of your dual containment tank. (optional)



2" Vent provides vacuum relief for interior tank. (optional)

Large Flat Surface Area provides ample space for a variety of fitting sizes and styles.

Enclosed Double-Wall Tank prevents foreign matter from entering outer containment tank.

Narrow Diameter provides location versatility in that it can fit through most any doorway.

Secondary Containment Tank provides 120% of inner tank's capacity. Complies with CFR-264.193.

All Other Industrial Product Fittings and accessories are available wherever applicable.

Molded-in Forklift Channels available on DCT's sizes 275 gallon through 500 gallon.

DOUBLE-WALL TANKS

CAPTOR CONTAINMENT SYSTEMS

Captor Containment System is designed to alleviate the ever-changing environmental and safety concerns regarding bulk chemical storage and containment for the 21st century. Captor's unique tank-in-a-tank design enables users and specifiers to incorporate advanced performance and safety features on a bulk-handling system, which provides total containment protection. Captor's double-wall construction is completely enclosed so that external matter, such as dust, rain and snow is prevented from collecting in the outer containment tank. Besides delivering unparalleled performance benefits, Captor Containment Systems also contribute to your company's bottom line by significantly reducing installation and procurement cost. Captors are shipped fully assembled on either a standard or wide-load flatbed trailer, which reduces comparable costs by an average of 35 percent.



Part No.	Gallons	Diameter	Height	Manway Dia.
5040000N--	550	76"	65"	18"
5470000N--	1100	76"	104"	18"
5490000N--	1550	76"	136"	18"
5570000N--	2000	102"	103"	18"
5580000N--	2500	102"	122"	18"
5590000N--	3000	102"	142"	18"
5600000N--	3500	102"	158"	18"
5610000N--	4000	102"	178"	18"
5620000N--	4500	102"	197"	18"
5630000N--	5000	102"	216"	18"
5660000N--	5500	120"	172"	18"
5670000N--	6500	120"	199"	18"
1006400N--	8700	142"	197"	18"
1006600N--	10,000	142"	226"	18"
1031100N--	12,500	142"	274"	18"

Flanged Outlets and other fitting designs can be securely fastened and sealed to many of the large flat areas located on the top section of the tank. (optional)

U-vent Assemblies are available in a variety of sizes to relieve stress from vacuum or pressure.

Top Lifting Eyelets make tank unloading and site handling easier and safer.

Fill and/or Draw Pipe Assemblies can be installed to facilitate different material loading or unloading requirements. (optional)

U.F.O. (Unified Fitting Outlet) is uniquely designed to mechanically seal fitting outlet through both the inner and outer tank walls. Material unloading is easier and more cost effective than pumping contents from the top of the tank. (optional)




OSHA-Approved Ladders are available with and without cages in fiberglass and galvanized steel construction.

Bolted and Threaded Manways are available in sizes up to 24". Standard size is an 18" threaded manway.

Molded-In Tie-Down Lugs interface with optional cable restraint system to meet seismic IBC code and 150 mph wind requirements.

Double-Wall Tank Construction encloses and interlocks outer and inner tank to prevent rain, snow, and debris from entering outer containment tank.

Outer Containment Tank provides 115-120% of inner tanks capacity for added safety factor. Complies with 40 CFR-264.193.

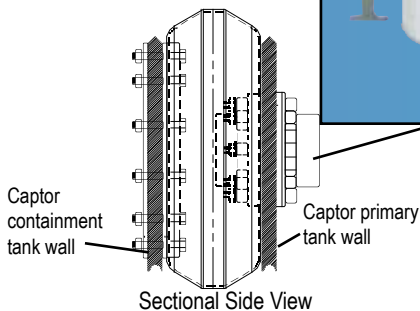

CHEMICAL FEED STATIONS

Complete and ready to use Chemical Feed Stations allow you to handle small amounts of liquids and other chemicals in a safer and more efficient manner than drums. The Chemical Feed Stations can be located close to your customer's use point, thereby eliminating the need for them to move and handle heavy drums and tote bins of hazardous materials, while at the same time eliminating the handling costs and inconvenient disposal of drums and one-way tote bins. Tanks available in both HDLPE and XLPE.



Part No.	Tank Style	Primary Tank Capacity (Gals.)	Containment Tank Capacity (Gals.)	Tank Specific Gravity	Overall Width	Overall Length	Overall Height	Manway Fill
10000102CF--	CFS	35	90	1.9	36"	47"	36"	6"
1000102CFWS--	CFS w/stand	35	90	1.9	36"	47"	52"	6"
5680001CF--	CFS	60	90	1.9	36"	47"	42"	6"
5680001CFWS--	CFS w/stand	60	90	1.9	36"	47"	58"	6"
5690000CF--	CFS	90	185	1.9	43"	56"	40"	14"
5690000CFWS--	CFS w/stand	90	185	1.9	43"	56"	53"	14"
570000CF--	CFS	120	185	1.9	43"	56"	50"	14"
570000CFWS--	CFS w/stand	120	185	1.9	43"	56"	66"	14"
5710000CF--	CFS	150	185	1.9	43"	56"	60"	14"
5710000CFWS--	CFS w/stand	150	185	1.9	43"	56"	76"	14"
5720000CF--	CFS	200	390	1.9	62"	76"	56"	14"
5720000CFWS--	CFS w/stand	200	390	1.9	62"	76"	73"	14"
5730000CF--	CFS	250	390	1.9	62"	76"	68"	14"
5730000CFWS--	CFS w/stand	250	390	1.9	62"	76"	84"	14"
5740000CF--	CFS	275	390	1.9	62"	76"	56"	14"
5740000CFWS--	CFS w/stand	275	390	1.9	62"	76"	74"	14"
5750000CF--	CFS	330	390	1.9	62"	76"	66"	14"
5750000CFWS--	CFS w/stand	330	390	1.9	62"	76"	83"	14"
5770000CF--	CFS	440	485	1.9	68"	67"	83"	14"
5770000CFWS--	CFS w/stand	440	485	1.9	68"	67"	83"	14"



Optional Polyethylene Stands available that fit inside the containment.



Bases are nestable with pump shelves removed.



CHEMICAL INJECTION SYSTEM TANKS & CONTAINMENT

We offer economical, high quality eco-friendly solutions to the chemical injection process.



Part No.	Item	Gallons	Width	Length	Height
1031500N--	Tank	65	32"	37"	20"
1003700N--	Stand	65	32"	30"	32"
1003800N--	Containment	165	45"	64"	15"
34702052	65 SS Band Assy - optional				
1003600N--	Tank	125	32"	43"	35"
1003700N--	Stand	125	32"	30"	32"
1003800N--	Containment	165	45"	64"	15"
34701725	125 SS Band Assy - optional				
1003900N--	Tank	225	38"	52"	41"
1004000N--	Stand	225	38"	35"	30"
1004600N--	Containment	300	54"	89"	16"
34701726	225 SS Band Assy - optional				
1004100N--	Tank	335	44"	56"	49"
1004200N--	Stand	335	44"	35"	35"
1004700N--	Containment	380	54"	89"	20"
34701727	335 SS Band Assy - optional				

6" threaded cap with vacuum vent.

Tanks are available in either HDLPE or XLPE material.

Enclosed containment top keeps birds and other animals out - making it environmentally friendly.

Pump mount brackets.

2" & 3" female threaded connection for accessory installations.



Molded in gallon markers are on all four sides of the tank.

100% HDLPE material construction makes it corrosion resistant.

Optional banding to secure tank to stand.

Carrying handles on both sides to make the containment easy to move.

Chemical Injection Systems for the Oil & Gas and Water Treatment Industries!

- Corrosion Resistant Polyethylene Stands - won't rust like steel stands which translates to reduced maintenance.
- Containment Basins provide 110% containment of tank.
- Containment Basins have a closed top to keep out debris and to keep wildlife from getting into the containment.
- Ideal for chemical injection or chemical feed systems that require a lower profile tank on a stand.

OPEN TOP TANKS & CONTAINMENTS



Vertical open-top containment tank designs incorporate an inward top flange lip, which provides optimum container structural integrity.



Cylindrical open-top tanks can be utilized as primary process or mix tanks or for secondary containment of an inner tank. All open-top tanks are available in high-density linear polyethylene (HDPE) – black and natural white color, which complies with FDA regulation 177.1520 and NSF standard 61, as well as cross-linked, high-density polyethylene (XLPE) – black and natural white color.

Part No.	Style	Gallons	Diameter	Height
1550200N--	VOT	175	42"	30"
1550300N--	VOT	290	42"	47"
1540600N--	VOT	345	48"	46"
1540500N--	VOT	500	48"	65"
1370200N--	VOT	650	60"	58"
527000N--	VOT	700	64"	54"
1370300N--	VOT	775	72"	44"
1370400N--	VOT	975	60"	80"
5400000N--	VOT	1000	64"	80"
5420000N--	VOT	1250	86"	55"
5030100N--	VOT	1350	72"	76"
1370600N--	VOT	1450	60"	120"
5030500N--	VOT	1550	96"	51"
5920000N--	VOT	1800	86"	76"
5030200N--	VOT	1850	72"	109"
5030300N--	VOT	1900	96"	62"
5940000N--	VOT	2500	102"	76"
5030400N--	VOT	2500	96"	78"
5070200N--	VOT	2850	96"	90"
5030600N--	VOT	3000	120"	65"
5950000N--	VOT	3600	102"	108"
5220100N--	VOT	4000	120"	83"
5230100N--	VOT	4900	143"	72"
5960000N--	VOT	5800	120"	125"
5220200N--	VOT	6100	120"	126"
5970000N--	VOT	6900	120"	146"
5230200N--	VOT	7100	143"	103"

RECTANGULAR OPTION TOP CONTAINMENTS



Part No.	Description	Width	Length	Height
1007700N--*	90 Gal. (holds a tank up to 28" dia. max.)	36"	47"	18"
1011300N--	160 Gal. (holds a tank up to 39" dia. max.)	47"	70"	16"
1007800N--*	185 Gal. (holds a tank up to 34" dia. max.)	43"	56"	24"
1011400N--	260 Gal. (holds a tank up to 56" dia. max.)	69"	93"	13"
1030700N--	275 Gal. (holds a tank up to 47" dia. max.)	53"	85"	17"
1011500N--	330 Gal. (holds a tank up to 56" dia. max.)	69"	93"	18"
1007900N--*	390 Gal. (holds a tank up to 48" dia. max.)	62"	76"	28"
6270700N--*	485 GAL. (holds a tank up to 48" dia. max)	68"	23"	29"
1009900N--	970 Gal. (holds a tank up to 60" dia. max.)	69"	117"	29"

OPEN TOP TANKS SYSTEMS



Open-top tanks come equipped with a standard lid cover and molded-in gallon/liter indicators. Standard lids incorporate unique rib designs to better support top-fitting installations.

OPEN TOP TANKS FLAT BOTTOM				
Part No.	Gallons	Diameter	Height	Lid Opening
10001VOT--	30	18"	31"	22"
56800VOT--	55	22"	37"	26"
56900VOT--	90	30"	36"	34"
57000VOT--	120	30"	47"	34"
57100VOT--	150	30"	57"	34"
57200VOT--	200	36"	53"	40"
57300VOT-	250	36"	65"	40"
57400VOT--	275	42"	53"	47"
57500VOT--	330	42"	63"	47"
57600VOT--	360	48"	53"	53"
57700VOT--	440	48"	64"	53"
57800VOT--	500	48"	72"	53"

TANK STANDS		
Part No.	Stand	Nominal Bottom Clearance
1370000N--	22" Dia.	12"
1370001N--	22" Dia.	18"
1690000N--	30" Dia.	12"
1690001N--	30" Dia.	18"
1730000N--	36" Dia.	12"
1730001N--	36" Dia.	18"
1750000N--	42" Dia.	12"
1750001N--	42" Dia.	18"
1760000N--	48" Dia.	12"
1760001N--	48" Dia.	18"



OPEN TOP TANKS "TOTAL DRAIN" BOTTOM				
Part No.	Gallons	Height w/12" stand	Height w/18" stand	Dia.w/stand
57900VOT--	55	52"	58"	34"
58000VOT--	90	52"	58"	42"
58100VOT--	120	63"	69"	42"
58200VOT--	150	73"	79"	42"
58300VOT--	200	70"	76"	48"
58400VOT--	250	81"	87"	48"
58500VOT--	275	71"	77"	54"
58600VOT--	330	80"	86"	54"
58700VOT--	360	72"	78"	60"
58800VOT--	440	82"	88"	60"
58900VOT--	500	90"	96"	60"

OPEN TOP TANKS SYSTEMS

Mixer Mount Assembly enables a wide variety of mixers to be attached and incorporated into batch tank system service capabilities. (optional)

100% HDLPE Material Construction complies with FDA Regulation 177.1520 and National Sanitation Foundation (NSF) standard 61.

Top Stiffening Ribs provide additional strength to help support top-fitting installations.

Outward Top Tank Flange Design provides optimum rigidity and strength.

Flat and Total Drain Bottom Tank Configurations are designed to interface with respective tank stands.

Fitting Options including welded, bolted or bulkhead types of fittings.



Hinged Lid Design
Superior all plastic hinge provides more reliable service and greater protection from dust and debris. Bolted and sealed lids also available. (optional)

Molded in Gallon and Liter Markers provide permanent gallonage indication for the life of the tank.

Unique Stand Leg Design provides strength and accessibility for forklift handling when tanks are full and empty with appropriate restraint banding. Also can be permanently mounted to the floor for long-term installations.

Heavy-Duty Plastic Stand Design is corrosion proof and available for both flat and total drain bottom tank configurations; stands elevate tanks 12" to 18" off the floor for fitting and piping clearance. (optional)

CLOSED TOP TANK "TOTAL DRAIN" SYSTEMS

CLOSED TOP TANKS "TOTAL DRAIN" BOTTOM W/PLASTIC STANDS

Part No.	Gallons	Height	Diameter	Top	Lid	O.D.	Height w/12" stand	Height w/18" stand
5790000N--	55	42"	26"	Flat	14"	34"	55"	61"
5800000N--	90	41"	34"	Flat	14"	42"	55"	61"
5810000N--	120	51"	34"	Flat	14"	42"	66"	72"
5820000N--	150	62"	34"	Flat	14"	42"	76"	82"
5830000N--	200	58"	40"	Flat	14"	48"	72"	78"
1540000N--	200	54"	40"	Domed	6"	54"	66"	72"
5840000N--	250	70"	40"	Flat	14"	48"	84"	90"
5850000N--	275	60"	47"	Flat	14"	54"	73"	79"
5860000N--	330	69"	47"	Flat	14"	54"	83"	89"
5870000N--	360	60"	53"	Flat	14"	60"	74"	80"
5880000N--	440	71"	53"	Flat	14"	60"	85"	91"
5890000N--	500	79"	53"	Flat	14"	60"	93"	99"
1800000N--	550	86"	48"	Domed	18"	60"	94"	100"
1810000N--	850	126"	48"	Domed	18"	60"	136"	N/A



Minimize waste and improve tank clean-out efficiencies with total drain bottom tank designs. Total drainage can be achieved through both

welded fitting (open top only) and mechanically fastened bottom fitting arrangements.

CONE BOTTOM TANKS



- Available in 30, 45 and 60-degree slopes, sizes range from 15-13,000 gallons.
- Material options for a diverse range of application requirements.
 - High-density linear polyethylene (HDLPE) - black and natural white color - Complies with FDA Regulation 177.1520 and NSF standard 61.
 - Cross-linked, high-density polyethylene (XLPE) - black and natural white color.
- Available with cable restraint system that meets 150 mph wind load and IBC seismic requirements.
- Specific gravity ratings are based on the industry's most severe calculation.
- Standard specific gravity choices are 1.5 and 1.9, other ratings are available upon request. Maximum operating temperature is 100° F.
- All materials are UV stabilized for long-term outdoor service.

Part No.	Gallons	Diameter	Cone Degree	Height in Stand	Manway
1520000N--	15	17"	45	38"	17"
1850000N--	17	19"	60	34"	8"
1580000N--	35	30"	30	34"	10"
1560000N--	65	30"	30	41"	10"
6070000N--	110	30"	30	56"	10"
*1560400N--	225	48"	30	54"	18"
*1560500N--	325	48"	30	66"	18"
6190000N--	500	64"	45	80"	18"
1890000N--	1000	86"	30	83"	10"
5000000N--	1000	64"	45	120"	18"
8310000N--	1250	95"	30	91"	18"
1900000N--	1400	86"	30	94"	10"
5010000N--	1500	64"	45	158"	18"
8330000N--	1600	95"	30	95"	18"
1910000N--	1650	86"	30	110"	10"
5070000N--	2000	90"	30	125"	18"
5110000N--	2500	90"	30	148"	18"
8350000N--	2500	95"	30	125"	18"
5100000N--	2600	90"	45	160"	18"
5150000N--	3000	90"	30	167"	18"
8360000N--	3000	95"	30	141"	18"
5440000N--	3900	90"	30	203"	18"
5180000N--	4100	90"	45	216"	18"
5200000N--	4400	90"	30	222"	18"
7040000N--	5500	90"	30	255"	18"
5280000N--	6000	142"	30	159"	18"
7180000N--	6500	90"	30	296"	18"
5320000N--	7400	142"	30	179"	18"
5340000N--	11,500	142"	30	238"	18"
7490000N--	13,000	142"	30	259"	18"

*Tank comes complete with poly stand only.



Smaller cone bottom tanks are ideal for small mix or batch applications.



Large cone bottom tanks ranging in sizes from 2,500 to 13,000 gallons, are used to store and deliver up to 10,000 cubic ft. of bulk resins at a processing plant.